

## DESCRIPTION

This versatile OP task seating collection offers a wide range of options to meet every professional need. Available in various versions, from low-back to high-back chairs, these ergonomic seats ensure comfort and support for long working hours. The collection includes both permanent-contact and synchronized mechanism models, providing the flexibility to adjust the seating experience according to individual preferences. The range is further expanded with sled-base waiting chairs and high stools for technical use, making this collection suitable for a wide variety of operational environments. Ergonomic, comfortable, and functional, each seat is designed to offer maximum support and comfort without compromising aesthetics. Perfect for modern and dynamic offices, this collection represents the ideal solution for any workspace that demands high performance and versatility.

## PLASTIC FRAME



Black



White

## WEIGHT AND WARRANTY


110  
KG

5  
YEARS

Considering the maximum weight recommended by ITALIAN SEDIOLITI. For warranty conditions, please refer to the general sales conditions at the beginning of the list.

THE PHOTO MAY INCLUDE OPTIONAL

## DIMENSIONS

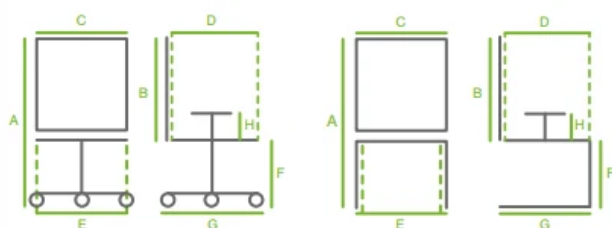

	A	B	C	D	E	F	G	H
OP MX SY4	105/116	60	46	44	47	42/54	67	
OP MX SY5	105/116	60	46	44	47	42/54	67	
OP A SY4	95/106	50	46	44	47	42/54	67	
OP A SY5	95/106	50	46	44	47	42/54	67	
OP A CPT	95/106	50	46	44	47	42/54	67	
OP B CPT	85/96	40	46	44	47	42/54	67	

### BACKREST (SY)

Reinforced polypropylene, height-adjustable with an Up&Down mechanism. Upholstered with expanded resin (25kg/m<sup>3</sup>) at a thickness of 30mm

### BACKREST (CPT)

Reinforced polypropylene, height-adjustable via a knob. Upholstered with expanded resin (25 kg/m<sup>3</sup>) at a 30 mm thickness. Lateral knob for tilt adjustment

### SEAT (400)

Loaded polypropylene covered with high-density expanded resin (40kg/m<sup>3</sup>), 40mm thickness. Removable padding for easy replacement

### MECHANISM (SY4)

Syncro mechanism with 4 locks, user weight-based adjustment, and anti-return device

### MECHANISM (SY5)

Syncro mechanism with 5 locks, user weight-based adjustment, and anti-return device

### MECHANISM (CPT)

Fixed plate with seat height adjustment lever

### GAS

Class 4 gaslift




### BASE

Nylon fiberglass-reinforced base with a removable metal safety ring, diameter 670mm

### WHEELS

Self-braking W-type wheels for all floors




OP MX SY4

 1  0.19  16



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	




OP MX SY5

 1  0.19  16



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	




OP A SY4

 1  0.19  15



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	




OP A SY5

 1  0.19  15



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	




OP A CPT

 1  0.14  14



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	

OP B CPT

 1  0.14  14



Cat. 1	
Cat. 2	
Cat. 3	
Cat. 4	

# OPTIONAL

## ARMRESTS



**BR GOLF**  
Fixed nylon armrests



**BR PAT**  
Fixed nylon armrests



**BR 1D CE**  
Adjustable armrests in 1 dimension. PP pad

## ARMRESTS




**BR 2D CE PU**  
Adjustable armrests in 2 dimensions. PU pad

## MECHANISMS



**MC TRASLA SY4**  
Seat depth translator for SY4 mechanism



**MC TRASLA SY5**  
Seat depth translator for SY5 mechanism

## BASES



**BA LX CR**  
Chrome-plated steel base, 700mm diameter



**BA LX NR**  
Black painted steel base, 700mm diameter

## UPHOLSTERIES



**IMB SED 400**  
Replacement padding for seat 400

Cat. 1
Cat. 2
Cat. 3
Cat. 4

## VARIOUS



**SED 400 PU**



**KIT COLORE OP**  
-White structure  
-White armrests 1D  
-White base

## CERTIFICATIONS



**KIT PER 1IM (TS)**  
Backrest/seat: fireproof fabric and resin (Berlin, Aurea Mood)

## CERTIFICATIONS



**KIT PER 1IM**  
Backrest/seat: fireproof fabric and resin (Alba, Bonday, King, Mini&Melange, Inca). Please contact one of our sales representatives



**KIT EN 1335**  
For the EN1335B certified version, please contact one of our sales representatives

