



D.LGS. 81  
del 2008

1IM (su  
richiesta)



THE PHOTO MAY INCLUDE OPTIONALS

DESCRIPTION

The welcoming Perfecto chair stands out for its clean and well-defined shapes, designed to offer superior comfort without compromising on a modern and refined design. Its linear and essential style makes it a versatile furnishing element, capable of enhancing any space with understated elegance, whether in executive offices or waiting and reception areas. The attention to detail and the selection of high-quality materials highlight its beauty and prestige, giving it an exclusive and professional appearance. Available in two versions – a high-back model for presidential use and a mid-back version, perfect for welcoming guests – this chair offers a perfect balance between comfort and style. The distinctive character of the chair is also expressed through a range of high-quality upholstery options, including elegant fabrics, faux leather, and premium leather. Each finish has been carefully selected to enhance its sleek design, ensuring a comfortable and flawless seating experience in every aspect.


WEIGHT AND WARRANTY

110  
KG

5  
YEARS

Considering the maximum weight recommended by ITALIAN SEDIOLITI. For warranty conditions, please refer to the general sales conditions at the beginning of the list.

DIMENSIONS

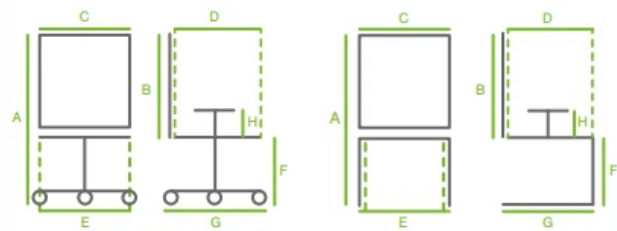

|            | A       | B  | C  | D  | E  | F     | G  | H  |
|------------|---------|----|----|----|----|-------|----|----|
| PCTO A OSI | 112/122 | 74 | 52 | 48 | 50 | 44/54 | 70 | 19 |
| PCTO B OSI | 92/102  | 54 | 52 | 48 | 50 | 44/54 | 70 | 19 |
| PCTO B SL  | 96      | 54 | 52 | 48 | 50 | 45    | 62 | 19 |



STRUCTURE

Load-bearing structure in beech plywood, covered with expanded resin and upholstered with fabrics or leathers



GAS

Class 4 gaslift



SLIDE

Black painted steel tube, 30mm diameter. Non-slip nylon feet



ARMRESTS

Fixed armrests in polyurethane




BASE

Nylon fiberglass-reinforced base with a removable metal safety ring, diameter 700mm



MECHANISM (OSI)

Italian simple tilting mechanism with user weight-based adjustment



WHEELS

Self-braking W-type wheels for all floors

**PCTO A OSI**

1 0.30 19



|                           |  |
|---------------------------|--|
| Cat. 1                    |  |
| Cat. 2                    |  |
| Cat. 3                    |  |
| Cat. 4                    |  |
| Leather + Sk (black only) |  |
| Leather (all colors)      |  |

**PCTO B OSI**

1 0.26 18



|                           |  |
|---------------------------|--|
| Cat. 1                    |  |
| Cat. 2                    |  |
| Cat. 3                    |  |
| Cat. 4                    |  |
| Leather + Sk (black only) |  |
| Leather (all colors)      |  |

**PCTO B SL**

1 0.26 17



|                           |  |
|---------------------------|--|
| Cat. 1                    |  |
| Cat. 2                    |  |
| Cat. 3                    |  |
| Cat. 4                    |  |
| Leather + Sk (black only) |  |
| Leather (all colors)      |  |

**OPTIONALS****ARMRESTS**

**BR RO ALU**  
Brushed aluminum armrests  
with PU covering

**MECHANISMS**

**MC PF**  
Fixed plate with seat height  
adjustment lever



**MC OAC**  
5-lock mechanism,  
advanced oscillating

**MECHANISMS**

**MC OAI**  
5-lock mechanism,  
advanced oscillating

**BASES**

**BA LX CR**  
Chrome-plated steel base,  
700mm diameter



**BA LX NR**  
Black painted steel base,  
700mm diameter

**BASES**

**BA AL RM**  
Polished aluminum base,  
700mm diameter



**BA 4P CR**  
Chrome-plated steel base  
with feet, 680mm diameter.  
For the slide version



**BA 4P CR TOR**  
Chrome-plated steel base  
with return column and feet,  
680mm diameter. For the  
slide version

**SLIDES**

**SL 30 CR**  
Chrome-plated slide

**VARIOUS**

**PIEDINI**  
5 nylon feet

**CERTIFICATIONS**

**KIT PER 1IM (TS)**  
Fireproof fabric and resin  
(Alba, Berlin, Bonday, King,  
Mini&Melange, Inca, Aurea  
Mood)