

# WH IMPORT RETE (TELAIO NERO)

CATAS

81-08


EN 1335 C  
(su richiesta)

D.LGS. 81  
del 2008

## DESCRIPTION


This version of the WH chair, entirely made of mesh and offered with a black frame, perfectly embodies the principles of minimalist, elegant, and modern design. The mesh shell not only provides superior comfort thanks to its breathability, but also adds a touch of sophistication and innovation to office spaces. Its understated elegance and durable construction make it an excellent choice for those seeking a seating option that is as beautiful as it is practical.

## MESH



Black

## STEEL FRAME



Black


## WEIGHT AND WARRANTY

110  
KG

2  
YEARS

Considering the maximum weight recommended by ITALIAN SEDIOLITI. For warranty conditions, please refer to the general sales conditions at the beginning of the list.

## DIMENSIONS

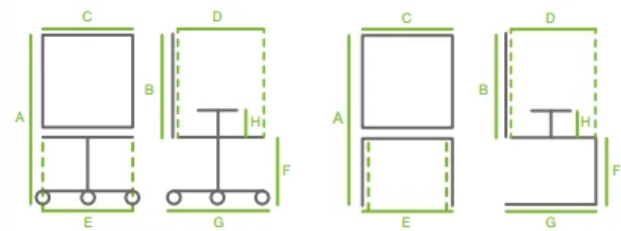

	A	B	C	D	E	F	G	H
WH NR A RT + OSEC KIT	108/120	65	44	47	56	42/52	70	22
WH NR B RT + OSEC KIT	89/101	46	44	47	56	42/52	70	22
WH NR B RT + SL KIT	91	46	44	47	56	46	69	22



### STRUCTURE

Load-bearing tube in black painted steel 30x15, covered with mesh



### ARMRESTS

Fixed armrests in black painted steel




### MECHANISM (OSEC)

Simple tilting mechanism with user weight-based adjustment




### GAS

Class 4 gaslift



### BASE

Black painted steel base, diameter 700mm



### WHEELS

Self-braking W-type wheels for all floors



### SLIDE

Black painted steel tube, 30mm diameter. Non-slip nylon feet

## WH NR A RT + OSEC KIT

 1 x 2 box  0.30  17



Rete nera




## WH NR B RT + OSEC KIT

 1 x 2 box  0.30  16



Rete nera

## WH NR B RT + SL KIT

 2  0.30  16



Rete nera

## OPTIONAL

### MECHANISMS



**MC OSI**  
1-lock mechanism, simple oscillating



**MC OAC**  
5-lock mechanism, advanced oscillating



**MC PF**  
Fixed plate with seat height adjustment lever

### VARIOUS



**PIEDINI**  
5 nylon feet

### CERTIFICATIONS



**KIT EN 1335**  
For the EN1335C certified version, please contact one of our sales representatives